

30 Pulverizer

30 Pulverizer ideal for **abrasive size reduction applications**; such as biomass, aggregates, raw minerals, glass, recycling & wood.

Hydraulic hood mechanism fitted for ease of access to grinding chamber to **reduce downtime** for regular tool change activity.

Replaceable wear parts available in Hardox® – **extended plant life**

TRY BEFORE YOU BUY At our UK Test Centre

Christy Turner can sample your material at our UK test centre **MSDS required**

Model	Motor Size (kW)	Screen Area (m ²)
30x30	110	1.03
30x40	200	1.35
30x40HT	200	1.35

Cast Iron machine body with replaceable liners

- Integrated seals for dust tightness
- **Fully lined** grinding chamber
- Beater type application dependant


Screen Options

- Wedge bar standard gap size 0.9mm to 260mm
- Perforated standard Ø3.0 to Ø12mm
- Special order sizes available

Dynamically balanced rotor

Interlocked grinding chamber

- Two hand operation in circuit with trapped key hydraulic fluid & energisation interlocking (ISO/TS 19837:2018)
- Prevention of unexpected start-ups (ISO 14118)

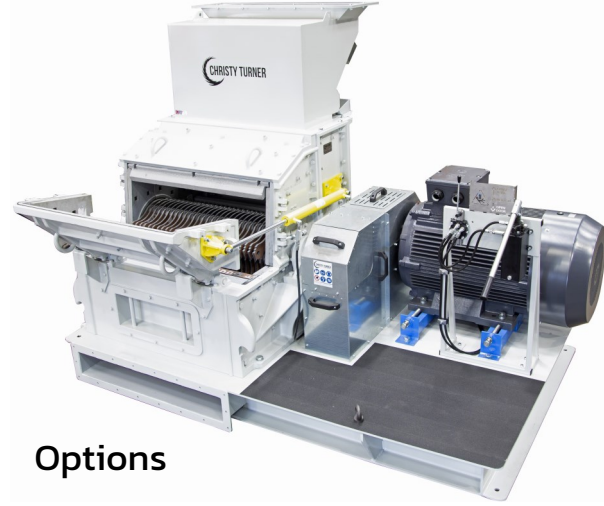

Options

- Vibration monitoring
- Automatic greasing
- High top variant
- Basic or variable speed control options available

Available with

- Various process connection interfaces
- Bearing temperature (PT100) sensors
- Grinding chamber temperature (PT100) sensors
- Inlet arrangement with various magnet strengths (configurable) to meet clients requirements.
- Discharge and support structure to suit client and material safety requirements.

**Replacement parts
& Servicing Available**



Christy Turner Ltd

Knightsdale Road

Ipswich

Suffolk

IP1 4LE

United Kingdom

E: info@christy-turner.com

+44 (0)1473 742 325

www.christy-turner.com

