

# INVENTHOR 6

SLOW SPEED SHREDDER LINE



# **INVENTHOR 6 and 6 Plus**

## **Redefining efficiency.**

The Inventhor 6 sets standards in terms of shredding efficiency. This model in the slow speed shredder line fits perfectly with Doppstadt's "Smart Solutions" concept. It impresses in every aspect as a mobile, modular machine that can be used cost-effectively and flexibly in a wide variety of applications. And thanks to its great efficiency, it distinguishes itself with a fast return on investment.

#### **EXTENDING OUR LEAD**

The Inventhor 6 combines the best of both worlds. It is technologically based on the latest generation of shredders from Doppstadt. At the same time, it consistently continues the success of its predecessor, geared to:

- higher efficiency
- good accessibility
- increased uptime

system, a maintenance-optimized engine compartment, an intelligent material feed, The whole shredding concept is designed a well-designed shredding compartment and an effective material discharge.

#### **SHREDDING WITHOUT COMPROMISE**

The unique and variable direct drive concept, the VarioDirect Drive forms the core to 90°. technology. It leverages Doppstadt's patented phase shifter gearbox. By continuously transferring torque to the shredding DW 3060. The entire machine concept is system, it ensures high production, low fuel consumption and optimum starting

performance, even when handling difficult shredding jobs!

The Inventhor 6 is able to handle a wide range of applications thanks to its flexible For instance, it includes an improved cooling shredding system with different tooth sizes.

> for high uptime of the machine, easy and fast maintenance or service work while offering improved safety. One example for the outstanding accessibility is the comb door which can be opened up

#### **ENSURING YOUR SYSTEM RUNS SMOOTHLY!**

The SLOW SPEED SHREDDER LINE includes all shredders that pre-shred and work at low speeds and high torque. All of these machines are consistently tailored to meet your requirements. And the result of our many years of expertise in successfully delivering high-quality and forward-looking technology.

That is why the Inventhor 6 takes the next important step compared to other machines. The effective drive train, the optimized material feed and shredding system including an excellent monitoring concept and production performance capacity even during demanding applications make the Inventhor 6 a highly efficient future-proof machine for almost every area of application that is able to handle a wide range of materials.

#### THIS IS DOPPSTADT

## **MACHINE DETAILS**



**COOLING SYSTEM DESIGN** 

Highly efficient cooling system geometry, directly upstream of hydraulic, reversible



**PLUG & PLAY** 

Simple operating concept makes daily routine tasks easy with the press of a button using different programs.



**ENGINE COMPARTMENT** 

The engine compartment offers lots of space and easy access to all components, such as engine equipment, transfer case with direct engine connection or to the load-sensing system.



**SMART HOPPER** 

Extended feed area and automatic adjustment of material feed to increase the production of the shredding system.



MATERIAL FEED AND SHREDDING CHAMBER

The steep walls of the feed hopper ensure continuous production. The flexible shredding concept with different shaft configurations allows a precise adaptation to different material requirements.



**VARIODIRECT DRIVE** 

The newly developed and patented Vario-Direct Drive delivers steplessly variable power directly to the shredding shaft.



makes it easy to utilize different rear-mounted






#### **INNOVATIVE DOOR CONCEPT**

All door panels open upwards ensuring optimum access. The GRP door panels with their large air vents ensure optimal ventilation, while reducing noise emissions at the same time.



#### **EASY ACCESS CONCEPT**

The counter comb door which opens up to 90° greatly ensures easy access to the entire shredding compartment. It also increases on-the-job safety and ensures a fast re-start after service work.



#### **MULTI TOOL CONCEPT**

Use of shredding tools equipped with Dopp-Lock® system from other slow speed shredders, available in sizes M and L including the new generation of limiters.








# **VARIODIRECT DRIVE**

### **Getting down to business.**

The patented direct drive handles literally all shredding jobs. The flexible VarioDirect Drive runs precisely even under the most difficult conditions with high power requirements.

#### **NEW STANDARDS IN TERMS OF DRIVE**

The VarioDirect Drive variably and continuously transmits torque to the shredding shaft, thus enabling entirely new, effective shredding. It impresses with its new reversing performance while loaded, with different speeds adapted to the material, which can be set with optimum torque independently of the diesel engine rpm, and the integration of different material-specific operating programs. This forward-looking drive concept thus provides all the functions of a hydraulic drive train while retaining the direct drive concept with its high efficiency, for which Doppstadt is well-known.

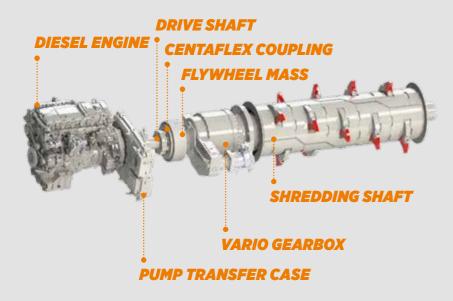

#### **OVERVIEW OF KEY ADVANTAGES:**

#### FLEXIBLE:

The shaft's direction of rotation can b reversed even while working

#### **INTELLIGENT:**

Automatic mode is disabled in case of overload

#### ADAPTABLE:

The gearbox ensures a flexible speed range for the shredding shaft, regardless of the main drive.

#### SAFE:

Shredding stops promptly in the even of any problems.

#### **READY TO GO:**

The efficiency of directly driven shaft ensures higher efficiency compared to hydraulically driven shredding systems. In addition to that, the gearbox allows for re-start even under load

#### ADJUSTABLE:

The gearbox enables the integration of various operating programs for different applications.

# **THE SHREDDING CONCEPT**Making short work of difficult jobs.

The Inventhor 6 is suited for shredding:

- waste wood
- green waste
- roots, stumps and logs
- · construction and demolition waste
- · commercial and industrial waste
- municipal solid waste


In order to successfully handle so many different tasks, we have further developed the advantages and technical characteristics of the DW series' proven shredding concept.

Shredding compartment: The feed hopper walls are steeper in relation to the shaft, ensuring that material can better enter the process. The space between the shredding shaft and under belt has been increased. The result: Improved discharge, better accessibility.

**Comb bar:** The wide-opening counter comb door makes it easy to access the shredding compartment and thus take out the entire comb bar. This ensures that all comb teeth can be replaced all at once. It also increases on-the-job safety and a fast re-start of the machine after completion of service work.

Limiter system & tools: Shredding tools and limiters can be replaced in a very short period of time. The wear part is separate from the suspension in the limiters' fastening concept.

**Shredding shaft:** The shaft can be rotated hydraulically to provide an optimal and easy tool replacement.

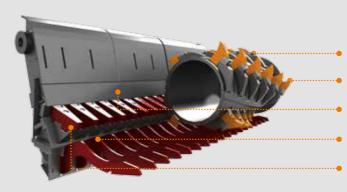

TOOLS WITH DOPP-LOCK® SYSTEM

**SHREDDING SHAFT** 

**STEEP SIDE WALLS** 

LIMITER

COUNTER COMB WITH TEETH



# **INSIDE INVENTHOR 6 and 6 Plus**

### Packed with advantages to the minutest detail.

The hydraulically driven **cooling system** automatically regulates the fan's speed in relation to the temperature. In addition, the large front hinged door ensures optimum access and makes the cooling system extremely easy to maintain.

The further developed engine compartment also ease maintenance and service work. Doors that are designed using lightweight GRP and which open upwards compartment from both sides.

Depending on your requirements, you can choose between an MTU engine with 354 hp (INVENTHOR 6) or a more powerful Caterpillar engine with 421 hp (INVENTHOR 6 Plus). These not only meet as it needs. The full functionality of the less remote control. In other words: The

the CAT engine is also available in the Tier IVf and Euromot IIIA emissions standards. constant belt speed even when the en-

that power is ideally transferred both are several rear belt options that are to the connected hydraulic pumps and to available. All versions (belt lengths 4.9 m the maintenance-friendly transfer case.

sures that the volume flow from the hydraulic pump is adapted to the required sure monitoring system that can stop the performance. This precisely metered flow shredding process when necessary. of oil also reduces fuel consumption, The simple operating concept relies on since the machine only gets as much oil

the latest stage V emissions standard, but hydraulic system can be leveraged at idle as well. The system also ensures a gine speed fluctuates, while the auxiliary The **optimized transfer case** provides hydraulic system is reliably working thanks several drives for the hydraulic pumps. to the continuous volume flow being provid-The direct engine connection ensures ed. Depending on job requirements, there and 7 m - both for semi-trailer and track-mounted chassis) can be adjusted ensure optimum access to the entire engine The ingenious **load-sensing system** ensembles of height and speed. All belts are also equipped with a pres-

a convenient and reliable 18-channel wire-

interaction of these individual components 
That makes the Inventhor 6 a first-class allows for achieving new levels of through- mobile shredder. put and efficiency.

Made by Doppstadt, made in Germany!



#### **RECYCLING WITHOUT** ANY DISTURBANCES.


## **TECHNICAL SPECIFICATIONS**

light package

INVENTHOR 6	3-AXLE TRAIL	ER CHASSIS	SEMI-TRAILER	CHASSIS	TRACK-MOUN	TED CHASSIS
		VO VO				
Overall weight	25,000 kg (der configuration)	pending on equipment	25,000 kg (der configuration)	pending on equipment	25,000 kg (dep configuration)	ending on equipment
Chassis		er chassis for 80 km/h, as d Traffic Licensing Regula- brake system		ssis for 80 km/h, as per St- ic Licensing Regulations), system	Track-mounted c drive, Two travel speed	hassis for self-propelled
Drive	Diesel engine		Diesel engine		Diesel engine	
INVENTHOR 6 Plus:	CAT C9.3B		CAT C9.3B		CAT C9.3B	
Nominal output	310 kW (421 H	P) at 1,800 rpm	310 kW (421 H	P) at 1,800 rpm	310 kW (421 HF	P) at 1,800 rpm
Emission standard	STAGE V / Tie	r IVf / EUROMOT IIIA	STAGE V / Tier	r IVf / EUROMOT IIIA	STAGE V / Tier	IVf / EUROMOT IIIA
Cubic capacity	9.300 cm <sup>3</sup>		9.300 cm <sup>3</sup>		9.300 cm <sup>3</sup>	
INVENTHOR 6:	MTU 6R1000 [	Daimler OM 936* MTU 6R1000 Daimler OM 936* MTU 6R1000 Daimler OM 936*				
Nominal output	260 kW (354 H	260 kW (354 HP) at 1,700 rpm 260 kW (354 HP) at 1,700 rpm		IP) at 1,700 rpm		
Emission standard	STAGE V	E V STAGE V STAGE V				
Cubic capacity	7.700 cm <sup>3</sup>		7.700 cm <sup>3</sup>		7.700 cm <sup>3</sup>	
Tank capacity	500 L		500 L		500 L	
Shaft/drum length	2,200 mm		2,200 mm		2,200 mm	
Shaft diameter	600/800 mm		600/800 mm		600/800 mm	
Shaft speed	-2 to 28 rpm		-2 to 28 rpm		-2 to 28 rpm	
Conveyor belt	Under belt	Rear belt	Under belt	Rear belt	Under belt	Rear belt
Width	800 mm	1,000 mm	800 mm	1,000 mm	800 mm	1,000 mm
Length	2,900 mm	4,900 mm/optional 7,000 mm	2,900 mm	4,900 mm/optional 7,000 mm	2,900 mm	4,900 mm/optional 7,000 mm
Discharge height		3,162 mm/4,219 mm		3,162 mm/4,219 mm		2,917 mm/3,967 mm
Conveying speed	1.3 to 2.9 m/s	1.25 to 3.0 m/s	1.3 to 2.9 m/s	1.25 to 3.0 m/s	1.3 to 2.9 m/s	1.25 to 3.0 m/s
Optional equipment	packages of size self-propelled dr m, overbelt mag attachment pane	on "Limiter", shredder M, L or XL, hydraulic rive, rear belt length 7 net, auxiliary hopper els, hopper wedge, water , winter package, LED	packages of size self-propelled dr m, overbelt mag attachment pane	on "Limiter", shredder M, L or XL, hydraulic ive, rear belt length 7 net, auxiliary hopper els, hopper wedge, water , winter package, LED	packages of size 7 m, overbelt mag attachment pane	on "Limiter", shredder M, L or XL, rear belt length gnet, auxiliary hopper Ils, hopper wedge, water winter package, LED


PACKAGE	SIZE XL (600)	SIZE L (600)	SIZE M (800)	
	on request			
Engine	CAT 310 kW	CAT 310 kW / MTU 260 kW	CAT 310 kW / MTU 260 kW	
Type		Shredding shaft with 30 (CAT only) or 20 teeth (14 comb teeth)	Shredding shaft with 72 teeth (2 comb plates)	
Diameter	600 mm	600 mm	800 mm	
Tooth length	170 mm	174 mm L/L-C3	100 mm	
Limiter		7 x Limiter L 600	9 x Limiter M 800	
Main areas of use	Heavy waste / waste wood	Green waste / waste wood / MSW / C+D / C+I waste / roots	Waste wood / limited special materials	

light package

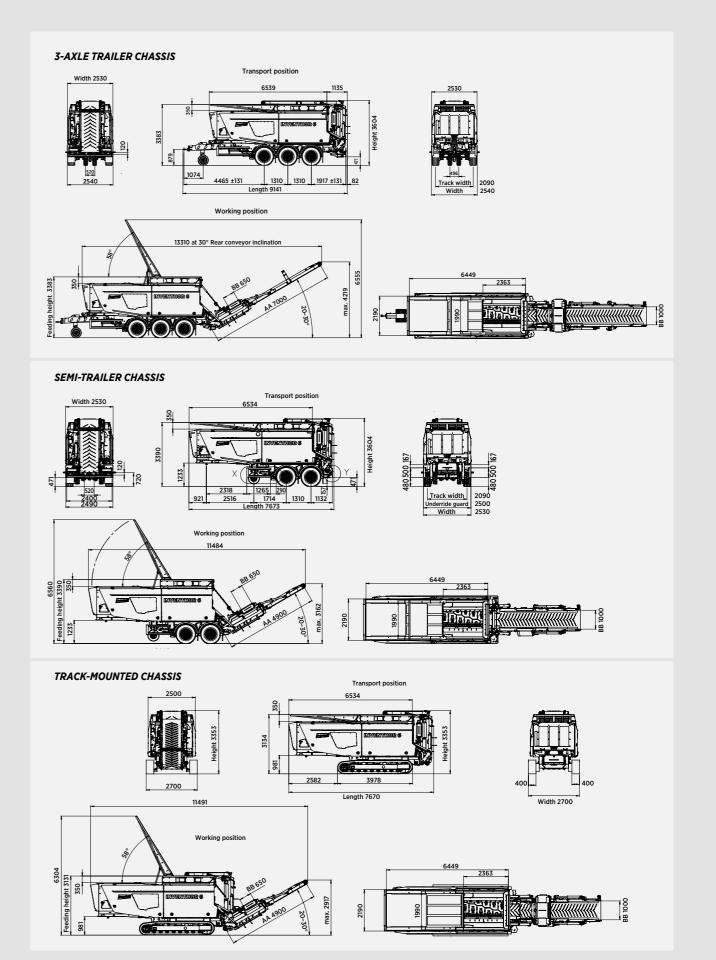

<sup>\*</sup> MTU engines are based on Mercedes-Benz's proven engine technology.

As of July 2021 – Subject to changes. All dimensions shown in mm. The information is to be regarded as approximate. Figures and descriptions might include options or additional components that are not part of the standard equipment.

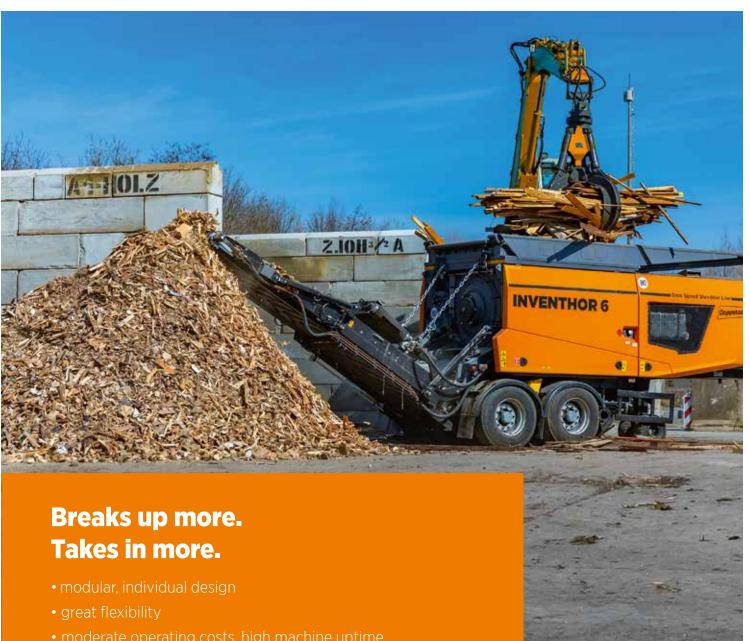

- outstanding shredding capacity even with
- excellent monitoring concept for shredding process



Doppstadt Umwelttechnik GmbH

Steinbrink 13, 42555 Velbert Germany

doppstadt.com

Phone +49 2052 889-0 info@doppstadt.de